

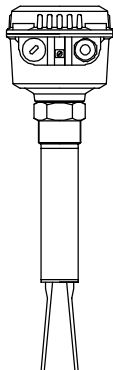


Series **VN 1000**
 VN 2000
 VN 5000
 VN 6000



Instruction manual

010516

UWT GmbH
Westendstraße 5
D-87488 Betzigau

Tel.: +49 (0)831 57123-0 Internet: www.uwt.de
Fax: +49 (0)831 76879 E-Mail: info@uwt.de

Scope of this instruction manual:	Types	VN 1020 1030 1050 VN 2020 2030 2050 VN 5020 5030 5050 VN 6020 6030 6050
	Approval	CE / TR-CU ATEX 1D 1/2D IEC-Ex t IIIC
	Electronic modules	Relay (SPDT, DPDT) PNP 2-wire without contact

Table of Contents

Safety /warning notes	Page	4
Fields of application	Page	4
Technical Data	Page	5
Application	Page	14
Installation	Page	17
Spare parts	Page	21
Electrical connection	Page	24
Switching logic	Page	28
Maintenance	Page	30
Assembly VN *020 separate housing	Page	31
ATEX / IEC-Ex Notes	Page	32

Safety /warning notes

Installation, maintenance and commissioning may be accomplished only by qualified technical personnel.

For terminal connection of the device, the local regulations or VDE 0100 (Regulations of German electrotechnical Engineers) must be observed.


All field wirings must have insulation suitable for at least 250V AC. The temperature rating must be at least 90°C (194°F).

In the case of handling by untrained personnel or handling malpractice, the safety of the device cannot be guaranteed.


Fields of application

Level limit switch for level limit detection in powder and bulk materials.

Technical Data

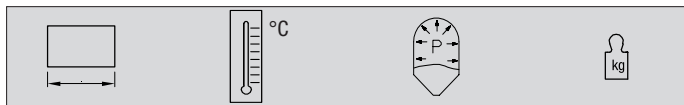


VN 1020
VN 2020


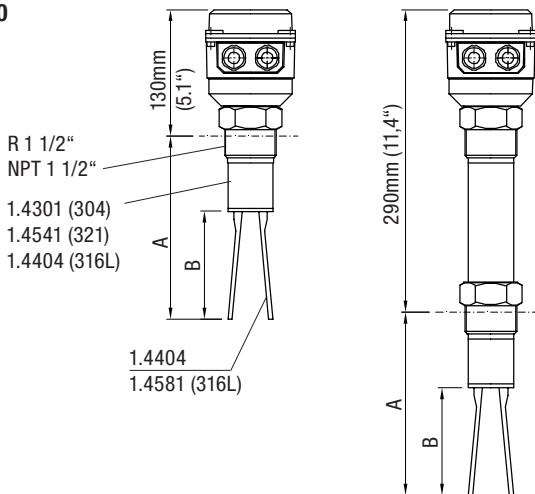


A, B →



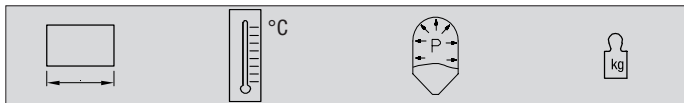


	① →	② →
	-1 .. +16bar (-14.5 .. +232psi)	-1 .. +16bar (-14.5 .. +232psi)
	~ 1,6kg (3.5 lbs)	~ 2,3kg (5 lbs)

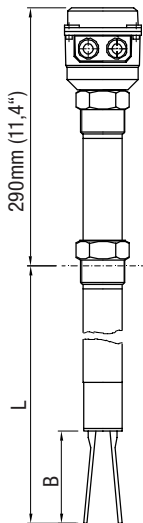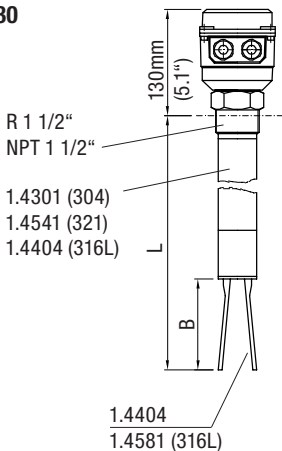

VN 1030
VN 2030









B, L →  11


 °C	① / ② →  12	② →  12
	-1 .. +16bar (-14.5 .. +232psi)	-1 .. +16bar (-14.5 .. +232psi)
 kg	~ 1,6kg (3.5 lbs) +2,5kg/m (+5.5 lbs per 39.9") (L)	~ 2,3kg (5 lbs) +2,5kg/m (+5.5 lbs per 39.9") (L)

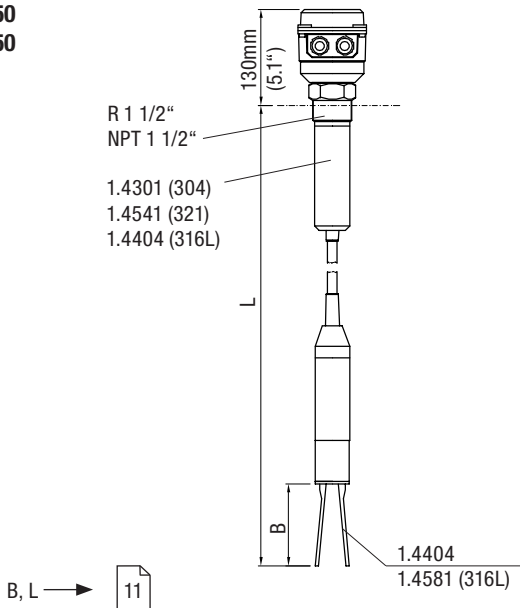


VN 1050
VN 2050



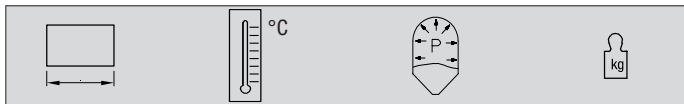






 °C	 → 
	-1 .. +6bar (-14.5 .. +87psi)
 kg	~ 4,0 kg (8.8 lbs) + 0,5 kg/m (+1.1 lbs per 39.9") (L)

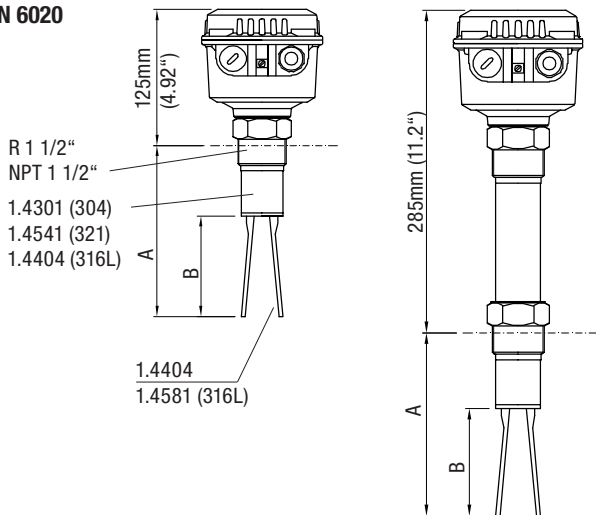

VN 5020
VN 6020




A, B → 

	 → 	 → 
	-1 .. +16bar (-14.5 .. +232psi)	-1 .. +16bar (-14.5 .. +232psi)
	~ 2,1kg (4.6 lbs)	~ 2,8kg (6.2 lbs)



VN 5030

VN 6030

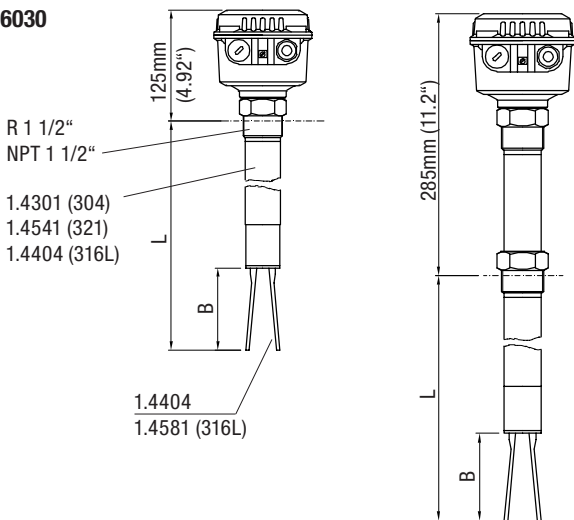


B, L →



	① / ② →	② →
	-1 .. +16bar (-14.5 .. +232psi)	-1 .. +16bar (-14.5 .. +232psi)
	~2,1kg (4.6lbs) +2,5kg/m (+5.5 lbs per 39.9") (L)	~2,8kg (6.2lbs) +2,5kg/m (+5.5 lbs per 39.9") (L)



VN 5050
VN 6050

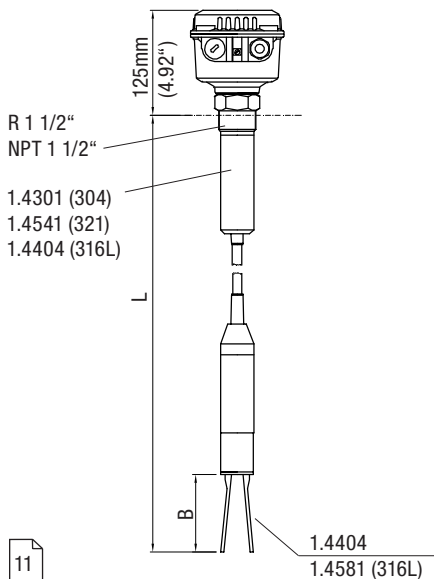

B, L →



	③ →
	-1 .. +6bar (-14.5 .. +87psi)
	~ 4,5 kg (9.9 lbs) + 0,5 kg/m (+1.1 lbs per 39.9") (L)

	A	B	L
VN 1020	165mm (6.5")	100mm (3.94")	
VN 1030		100mm (3.94")	max. 4.000mm (157.5")
VN 1050		100mm (3.94")	max. 7.000mm (276")

VN 2020	235mm (9.25") (1) 260mm (10.2")	170mm (6.69") (1) 195mm (7.68")	
VN 2030		170mm (6.69") (1) 195mm (7.68")	max. 4.000mm (157.5")
VN 2050		170mm (6.69") (1) 195mm (7.68")	max. 20.000mm (787")



VN 5020	165mm (6.5")	100mm (3.94")	
VN 5030		100mm (3.94")	max. 4.000mm (157.5")
VN 5050		100mm (3.94")	max. 7.000mm (276")

VN 6020	235mm (9.25") (1) 260mm (10.2")	170mm (6.69") (1) 195mm (7.68")	
VN 6030		170mm (6.69") (1) 195mm (7.68")	max. 4.000mm (157.5")
VN 6050		170mm (6.69") (1) 195mm (7.68")	max. 20.000mm (787")



(1) Option switching sensitivity > 5 g/l (0.3 lb/ft³)





1

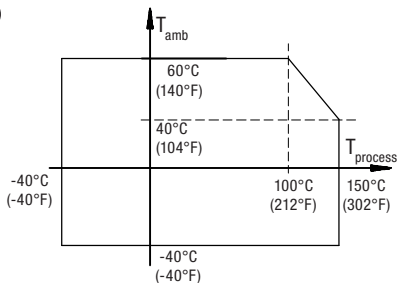


2

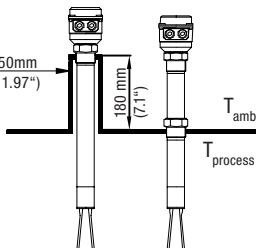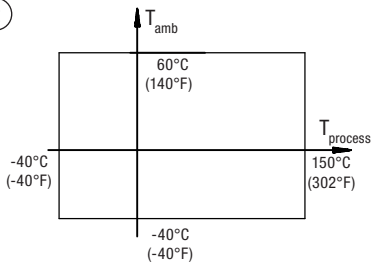


3

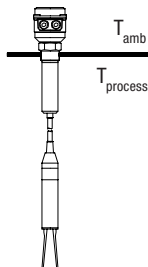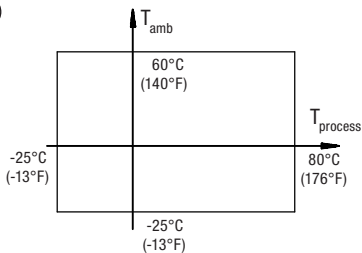

Sensitivity




	B g/l	A g/l
VN 1000	50	150
VN 2000	20 / 5 ⁽¹⁾	75
VN 5000	50	150
VN 6000	20 / 5 ⁽¹⁾	75
	1g/l = 0.06 lb/ft ³	

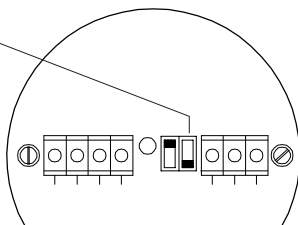


(1) Option switching sensitivity > 5 g/l (0.3 lb/ft³)

Bulk material

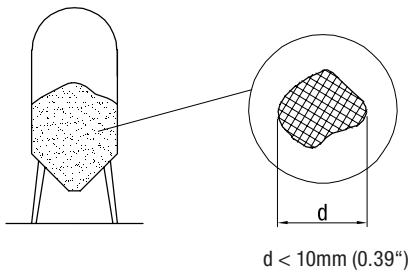


Application

VN 1020
VN 2020
VN 5020
VN 6020

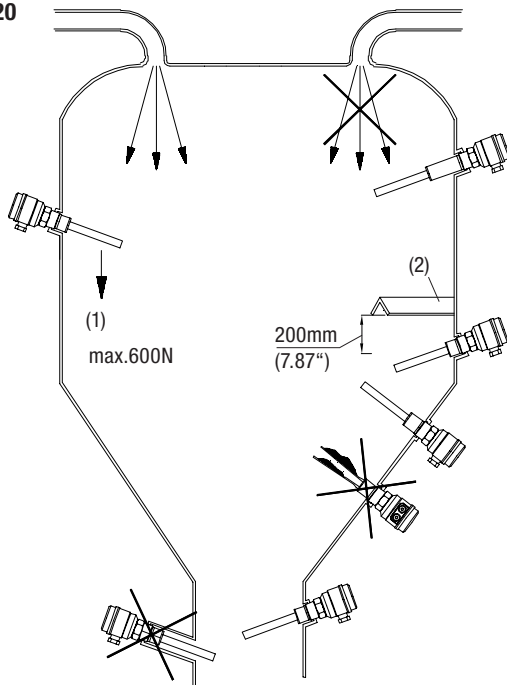


- (1) Mech. load of the sensor
(2) Protective angle (canopy) in case of high mechanical load

VN 1030
 VN 2030
 VN 5030
 VN 6030

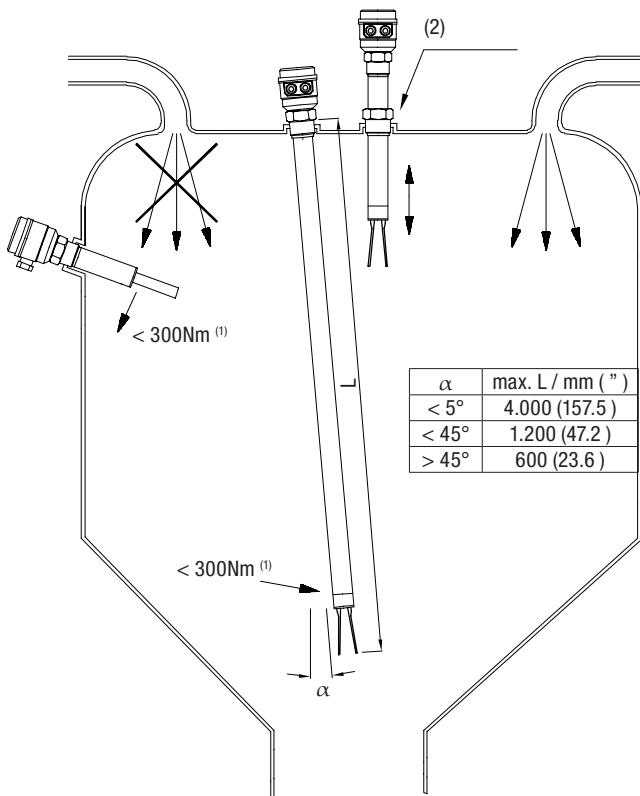

- (1) Mech. load of the sensor
 (2) Sliding sleeve: Tighten straining screws with 20Nm


VN 1050
VN 2050
VN 5050
VN 6050

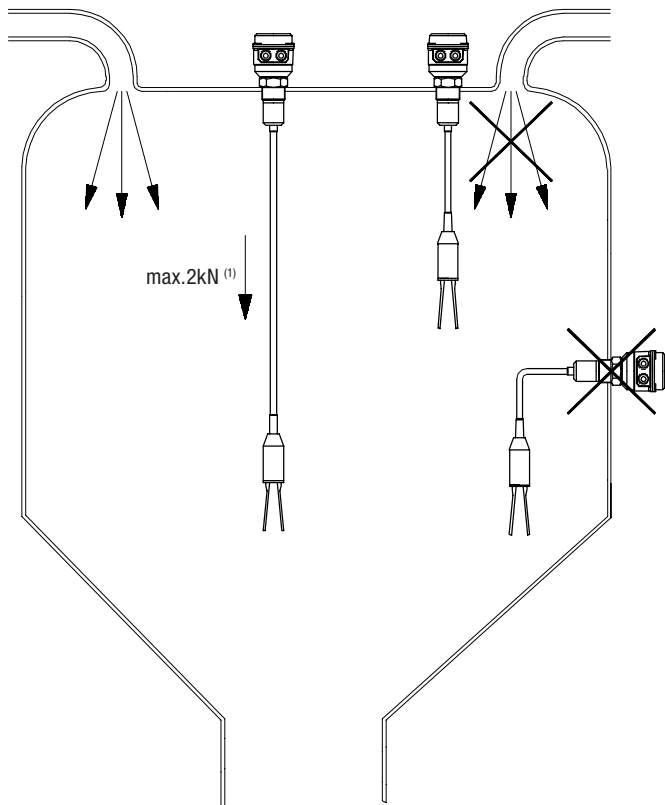


(1) Mech. load of the sensor


Assembly

Fixing Threads



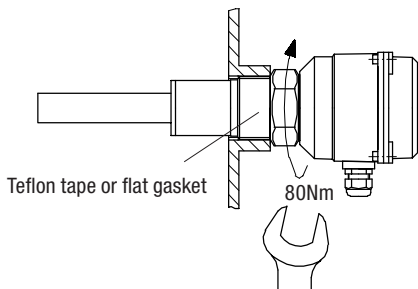


Fixing Flanges

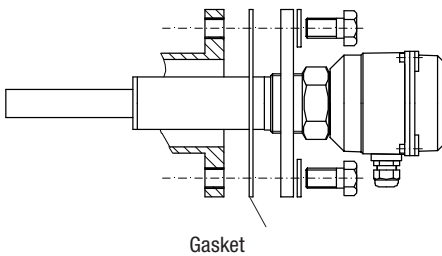

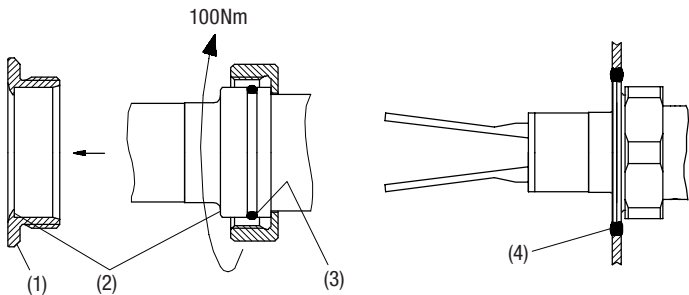


- (1) Certified flush welding socket must be used
- (2) Metal-metal support without any gap
- (3) Sealing ring
- (4) Welding (observe hygiene requirements)

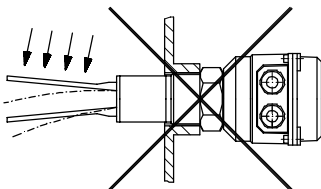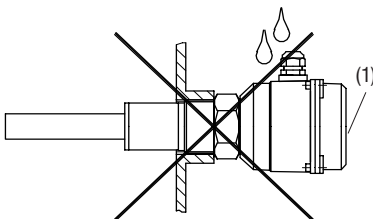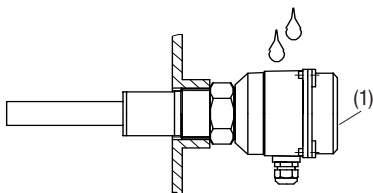


(1) Ingress protection
IP 66 / IP67

Treatment

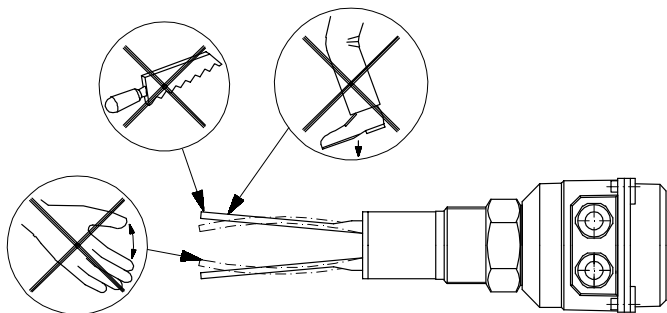


Option: Weather protection cover

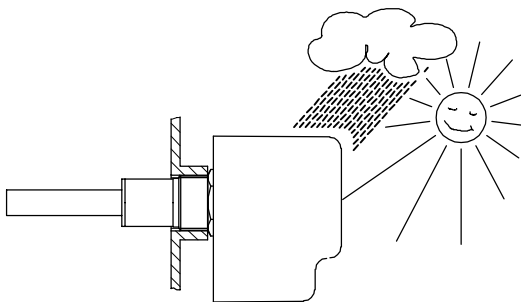


for Ex only approved for Zone 22

Spare parts







	CE / ATEX / IEC-Ex: VN 1020 VN 1030 CE: VN 1050	ATEX / IEC-Ex: VN 1050	CE / ATEX / IEC-Ex: VN 5020 VN 5030 CE: VN 5050	ATEX / IEC-Ex: VN 5050
<p>19...230V 50/60 Hz 19...55V DC</p>	pl100932	pl100120	pl100932	pl100120
<p>19...230V 50/60 Hz 19...55V DC</p>	pl100247	pl100052	pl100247	pl100052
<p>18...50V DC PNP</p>	pl100246	pl100123	pl100246	pl100123
<p>19...230V AC/DC</p>	pl100242	pl100122	pl100122	pl100172



	CE / ATEX / IEC-Ex: VN 2020 VN 2030 CE: VN 2050		CE / ATEX / IEC-Ex: VN 6020 VN 6030 CE: VN 6050		ATEX / IEC-Ex: VN 2050		ATEX / IEC-Ex: VN 6050
<p>19...230V 50/60 Hz 19...55V DC</p>	pl100930	pl100124	pl100930	pl100124			
<p>19...230V 50/60 Hz 19...55V DC</p>	pl100193	pl100050	pl100193	pl100050			
<p>18...50V DC PNP</p>	pl100176	pl100127	pl100176	pl100127			
<p>19...230V AC/DC</p>	pl100182	pl100126	pl100126	pl100126			




	CE / ATEX / IEC-Ex: VN 2020 VN 2030		CE / ATEX / IEC-Ex: VN 6020 VN 6030	
	CE: VN 2050	ATEX / IEC-Ex: VN 2050	CE: VN 6050	ATEX / IEC-Ex: VN 6050
 <p>19...230V 50/60 Hz 19...55V DC</p>	pl100931	pl100128	pl100931	pl100128
 <p>19...230V 50/60 Hz 19...55V DC</p>	pl100194	pl100051	pl100194	pl100051
 <p>18...50V DC PNP</p>	pl100173	pl100131	pl100173	pl100131
 <p>19...230V AC/DC</p>	pl100187	pl100130	pl100130	pl100130

Electrical connection

All electronic modules: Over voltage category II

Relay SPDT

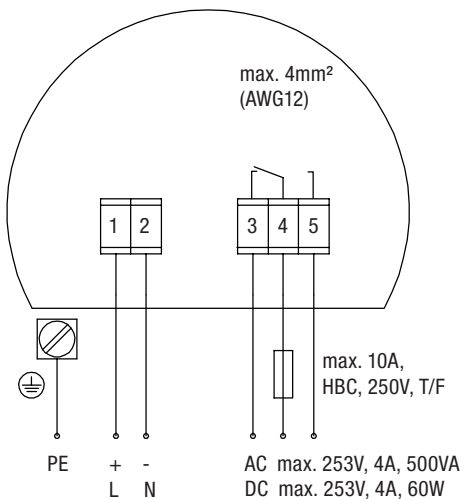

(1)


19...230V +10% ⁽³⁾ 50/60Hz 8VA

19... 50V +10% DC 1,5W

(2)




- (1) Power supply
- (2) Isolating voltage
- (3) including 10% from EN 61010

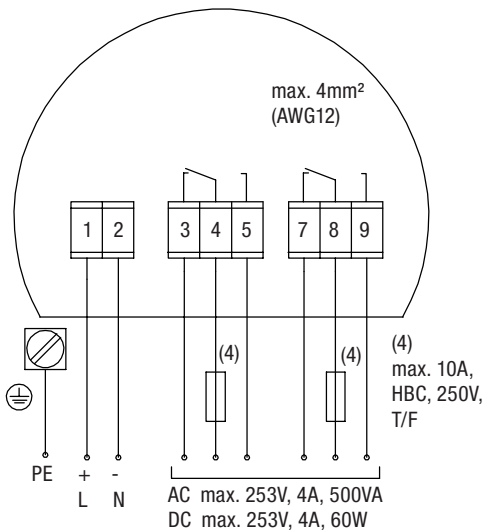


(1)

19...230V +10% ⁽³⁾ 50/60Hz 18VA

19... 50V +10% ⁽³⁾ DC 2W


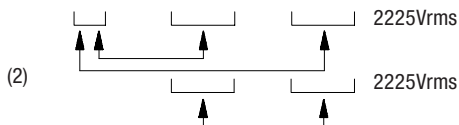


- (1) Power supply
- (2) Isolating voltage
- (3) including 10% from EN 61010

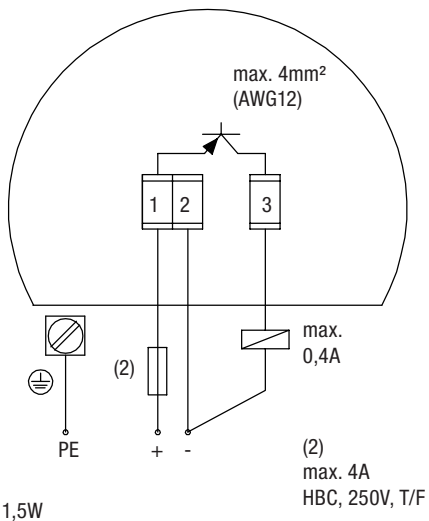


- (1) Power supply
(3) including 10% from EN 61010

2-wire without contact

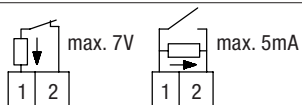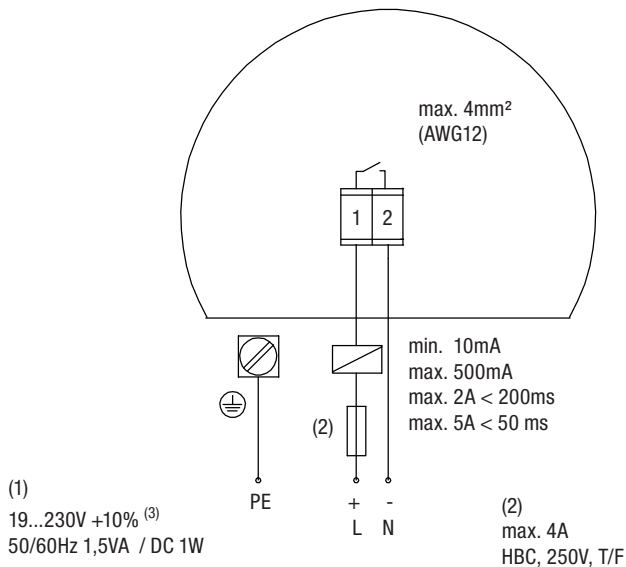

- (1) Power supply
(3) including 10% from EN 61010

Switching logic



	FSL	FSH	
			(1)
			(2)
			(3)
			(4)
			(5)
			(1)
			(2)
			(3)
			(4)
			(5)

(1) = Relais SPDT


(2) = Relay DPDT

(3) = PNP

(4) = 2- wire without contact

(5) = LED Signal



Signal delay (Relay DPDT)

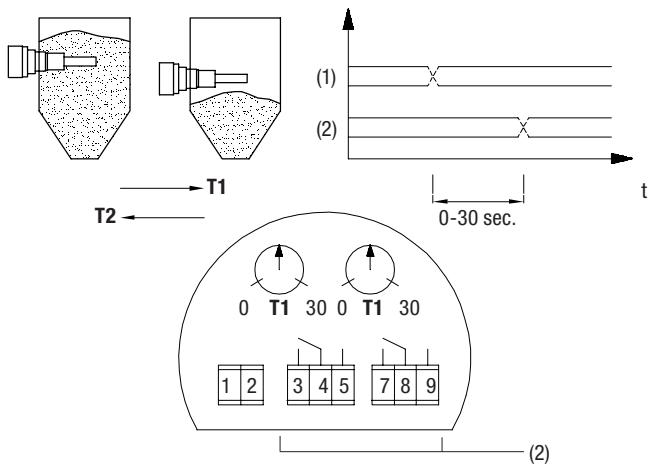

(1) = level
(2) = relay output

Maintenance

Cleaning

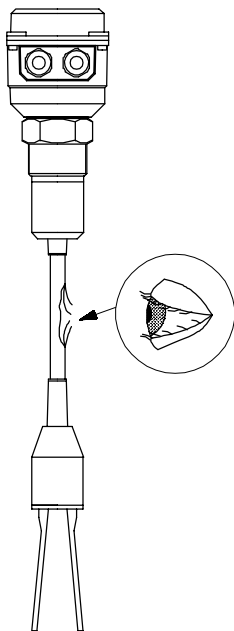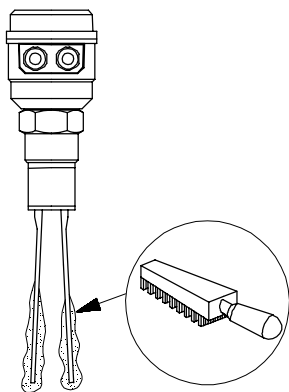

Assembly

Separate housing (selection: pricelist pos.26)

VN 1020

VN 2020

VN 5020


VN 6020

VN 1030

VN 2030

VN 5030


VN 6030

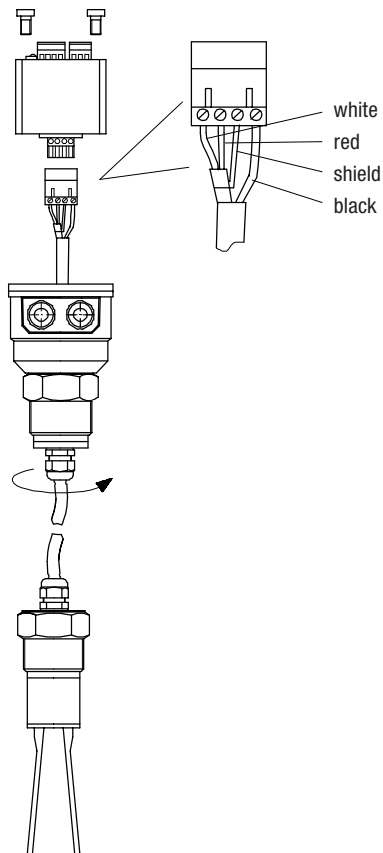

ATEX II 1D 1/2D + IEC-Ex t IIIC Da, Da/Db

Notes

Permitted relative pressure




-0,2...+0,1bar
(-2.9...+1.45psi)

Zone borders

VN 1020/1030
VN 2020/2030
VN 5020/5030
VN 6020/6030

VN 1020
VN 2020
VN 5020
VN 6020






VN 1030
VN 2030
VN 5030
VN 6030

VN 1050
VN 2050
VN 5050
VN 6050


(1) 1D 2D
(2) Da Db
(3) 20 21

(1) 1D 1D
(2) Da Da
(3) 20 20




(1) Category (2) EPL (IEC-Ex) (3) Zone

Ambient temperature**max. Surface temperature**


 60°C (140°F)	80°C (176°F)	120°C (248°F)
	90°C (194°F)	120°C (248°F)
	100°C (212°F)	120°C (248°F)
	110°C (230°F)	120°C (248°F)
	120°C (248°F)	120°C (248°F)
	130°C (266°F)	130°C (266°F)
	140°C (284°F)	140°C (284°F)
	150°C (302°F)	150°C (302°F)

The data of the table are valid, if it is guaranteed due to the installation that the thread part has a maximum temperature of 80°C (176°F) at normal use.

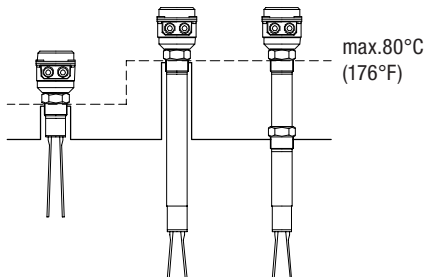


VN 1000

VN 2000



VN 5000

VN 6000

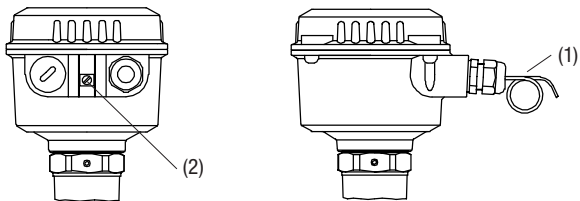

- (1) A pull relief must be provided
- (2) Connect with equipotential bonding of the plant

ATEX / IEC-Ex: Further Remarks

For installation and field wiring the respectively valid installation regulations of the respective country must be observed.

Commissioning only with closed lid.

Do not remove the lid (cover) while circuits are alive.

Before opening the lid take care, that no dust deposits or whirlings are present.

The installation has to be carried out in a way, that mechanical friction or impact does not cause sparks between the aluminium enclosure and steel.

If installing the whole unit in zone 20, the power supply shall be rated for a prospective short circuit current of not more than 10kA (details of EN 60079-14 must be obeyed)

Cable glands:

Installation according to the regulations of the country, where the product is installed.

Not used entries have to be closed with blanking elements certified for this purpose.

Where applicable the factory provided parts must be used.

A strain relief must be provided for the field wiring cables, when the device is installed with the factory provided cable glands.

The diameter of the field wiring cable must match to the clamping range of the cable clamp.

If other than the factory provided parts are used, following must be ensured: The parts must have an approval adequate to the approval of the level sensor (certificate and type of protection).

The approved temperature range must be from the min. ambient temperature of the level sensor to the max. ambient temperature of the level sensor increased by 10 Kelvin.

The parts must be mounted according to the instructions of the supplier.