

Stonel[™] Axiom[™] advanced explosionproof, nonincendive & intrinsically safe on/off valve controller AN/ANX series





Advanced performance

The Axiom series offers unmatched reliability using non-contact position sensing with solid state electronics and contaminant-tolerant pneumatic control. Coupled with its space-efficient design, corrosion resistance and networking/Wireless Link capability, the Axiom offers unrivaled convenience and cost-saving benefits in hazardous and general purpose process applications.

Exceptional reliability

The proven technologies combined with efficient design and durable materials, delivers long life and exceptional performance.

- Survives harsh conditions
- Tolerates air contaminants
- Provides solid state position-sensing

User-friendly advanced technology

Designed with the user in mind, the Axiom offers the utmost in ease and convenience.

- Rapid enclosure entry
- Easy configuration
- Convenient wiring access
- Wireless Link app set up

Universal application

The strategic engineering reduces inventory and ensures universal adaptability in many applications and environments.

- Universal voltage capability
- Selectable SR/DA action
- Direct actuator attachment

Space efficient design

The Axiom encloses all electrical components in a compact package. The automated valve spacing envelope is minimized without compromising performance or maintainability.

- Requires less than 5" of total clearance
- Additional 2" clearance for cover removal
- No tools for cover removal



Features

1. Impact-resistant cover

Cover screws off for rapid entry without tools and withstands high-pressure wash downs and typical process environment corrosives. (AN is clear Lexan[®] and ANX is epoxy coated aluminum for explosionproof or Ex d applications).

- 2. Universal voltage solenoid system Operates from 24 VDC – 250 VAC at extended temperate range and features manual override. Single or dual coil available.
- 3. Convenient settings

Touch pad enables position settings to be conveniently locked in. Switch settings remain in place during power cycling.

4. Fully sealed module

Solid state, fully potted sensors provide protection against residual moisture, vibration, and corrosives.

5. High flow pneumatic valve

5-way, 2-position valve operates on standard plant air. Rebreather prevents ingestion of contaminated air into actuator.

6. High visibility indication

Mechanical and electronic indication confirms open and closed position. Intense LEDs display position status from a distance (clear cover option) and when cover is removed the visibility is useful for commissioning and troubleshooting.

7. Exceptional long life

Magnetic position sensor has no bushings or shafts to wear out, delivers reliable performance, and is unaffected by actuator shaft wear.

8. SR/DA plug


Plug positions into designated port to enable spring return or double-acting operation.

9. Direct actuator attachment


Compact mounting manifold system requires less space and wiring, connects to VDI/VDE 3845 (NAMUR) actuators and adapts to spring return or double-acting actuators.

Proven performance in process industries

- Chemical
- Oil and gas
- Pharmaceutical and biotech
- Food and beverage
- Marine
- Offshore service vessels (OSV)
- Biofuels
- And more...

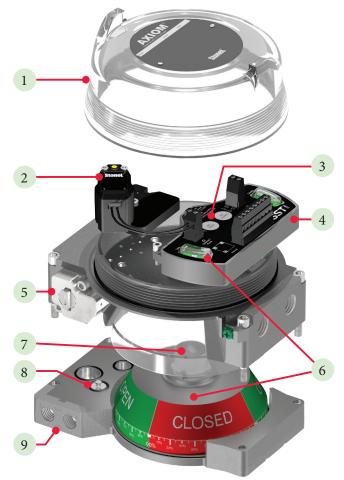



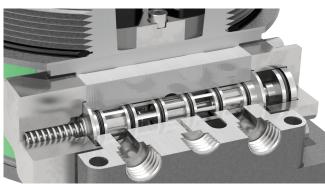

Pneumatic control

The Axiom's pneumatic valve system consists of a lowpower pilot that drives the main high-flow spool valve. Pilots may be selected for conventional or bus networking applications. Both stages of the pneumatic valve system have been designed for long life, high tolerance to air line contaminants, and ease of maintenance should components become fouled. Pilots are automatically associated with the appropriate function selected.

Special features

- Solenoid pilot and main spool design offer long life, exceptional tolerance to dirty air, and tight shut-off.
- Universal voltage solenoid system may be used for standard AC or DC applications.
- Five-way, two-position spring return configuration may be used for either single- or double-acting actuators. Dual coil shuttle piston versions are also available for failin-last position.
- Rebreather channels exhausted air from pressurized side of actuator into spring side, preventing ingestion of contaminated air from the environment that may corrode springs or actuator internals.
- Pneumatic manual override is conveniently located on top for easy access.



Single or dual pilot configuration

The Axiom is available in either single or dual pilot configurations. Dual pilot options are available for shuttle piston, fail-in-last position applications. Several external manual override options are also readily available. For special valve configurations with non-standard manual override features, please consult factory.



General pneumatic v	alve specificat	ions				
Valve design	Pilot operated	spool va	lve			
Configuration	Single pilot Dual pilot		2-position, spring return 2-position, shuttle piston			
Flow rating	0.8 Cv 1.2 Cv					
Axiom porting	1/4" NPT (0.8 Cv) 3/8" NPT (1.2 Cv)					
Manifold porting	1/4" NPT					
Operating pressure	45 psi to 120 ps	si (3.1 to	8.2 bar)			
Operating temperature	-40° C to 80° C	(-40° F	to 176° F)			
Operating life	1 million cycles	s				
Manual override	Internal mome Optional extern Optional extern	nal mon	nentary available ing available			
Materials of construction	Spool Body Seal spacers Spool seals O-rings End-caps and fasteners		Nickel plated aluminum Epoxy-coated anodized aluminum Polysulfone Nitrile compound Nitrile compound Stainless steel			
Solenoid coil specific	ations					
35 Operating voltage Power consumption Filtration requirements		250 VAC	/DC (1.1 watts typical) (0.5 watts typical)			
35 with conduit option 18 (8-pin micro) Operating voltage Power consumption		50 VAC (DC (1.1 watts typical) (0.5 watts typical)			
45 Operating voltage Power consumption Filtration requirements	12 - 24 VDC (output of barrier) 0.5 watts @ 12 VDC; 1.0 watt @ 24 VDC 50 micron					
92 & 97 Operating voltage Power consumption	24 VDC 0.5 watts					

Filtration requirements

50 micron

Manifold and mounting system

The Axiom is designed to readily adapt to most quarterturn actuators. The mounting manifold system combines the mounting base and pneumatic manifold to minimize space and simplify installation. It attaches the Axiom directly to the actuator and ports air from the pneumatic valve to the actuator.

Included in the manifold system are:

- 1. Actuator shaft adaptor and fastener.
- 2. Epoxy-coated anodized aluminum mounting plate manifold with o-rings and stainless steel fasteners.
- 3. Pneumatic plug for SR/DA configuration.

The manifold system readily adapts to VDI/VDE 3845 sizes 1, 2 and 3. Special variations may be made for sizes 3, 4 and non-standard quarter-turn actuator mounting patterns.







The mounting manifold system is specified and sold separately. Kits are specific to actuator manufacturer or kit numbers visit stonel.com/mounting.

Single or double-acting configuration

The same Axiom model is suitable for both single-acting/ spring return (SR) and double-acting (DA) actuators. The standard rebreather capability for single-acting/ spring return is built in. Field configuration may be made by conveniently removing and reinserting the plug for the appropriate actuator type. For rebreather to function properly, both manifold ports must be tubed to the actuator.

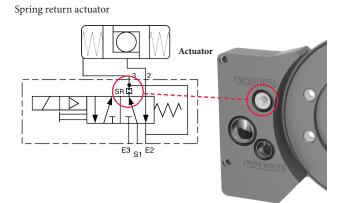

Double-acting actuator

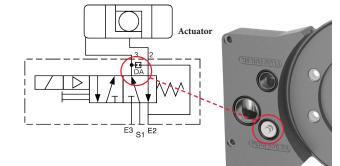

Sensing and communication module

Switching and sensor specifications							
SST NO sensor (35S & 35W)							
Configuration	(2) NO 2-wire solid state sensors						
Voltage range	20 - 250 VAC/VDC 8 - 75 VDC; 20 - 60 VAC [35S with conduit option 18 (8-pin micro)]						
Minimum on current	2.0 mA						
Maximum continuous current	0.1 amps						
Typical leakage current	AC circuits 0.35 mA DC circuits 0.25 mA						
Typical voltage drop	6.5 volts @ 10 mA 7.2 volts @ 100 mA						
Circuit protection	Protected against short circuits and direct application of voltage with no load.						

Wiring diagram (35S & 35W)



Solenoid Valve


Solenoid Valve



Valve Communication Terminal (VCT) specifications DeviceNet[™] communication (928 & 92W)

Devicer ver communicat					
Communication protocol	DeviceNet™				
Configuration	 (2) Discrete inputs (sensors) (1) Auxiliary analog input (4-20 mA) (2) Discrete outputs (solenoids) 				
Input voltage	11 - 25 VDC via DeviceNet™ network				
Output voltage	24 VDC				
Analog input impedance	254 ohms				
Quiescent current	No analog input, no outputs energized: 35 mA @ 24 VDC; 57 mA @ 11 VDC				
Maximum output current	150 mA (all outputs combined)				
Default address	63 (software assigned)				
Default baud rate	125K (software selectable 125K, 250K or 500K baud)				
Messaging	Polling, cyclic and change of state				
DeviceNet [™] type	100				
Wiring diagram (92S & 92W)					

Device/\et



Switching and sensor specifications NAMUR sensor (45S) Configuration (2) NAMUR sensors (EN 60947-5-6; IS) Voltage range 5 - 25 VDC Current ratings Target present Target absent current < 1.0 mA current > 2.1 mA

Use with intrinsically safe repeater barrier. NAMUR sensors conform to EN 60947-5-6 standard.

Intrinsically safe solenoid coil

12 - 32 volts from output of solenoid barrier to coil*

*Note: Use of an intrinsically safe solenoid barrier with internal impedance, or end-to-end resistance, of \leq 500 ohms required for proper solenoid coil operation.

Wiring diagram (458)

V

Ø

Ø

0

Ø

Ø

Ø

Ø

not used

Ø

NAMUR



	Valve Communication Terminal (VCT) specifications							
	AS-Interface communication and extended addressing (97S & 97W)							
Communication protocol		AS-Interface v3.0						
	Configuration	(2) Discrete inputs (sensors)(2) Auxiliary discrete inputs(2) Discrete outputs (solenoid)						
	Input voltage	26.5-31.6 VDC (AS-I voltage)						

Output voltage	24 VDC (+/- 10%)	
Quiescent current	35 mA	
Maximum output current	100 mA (all outputs combined)	
Default address	0A	
ID/IO codes	ID = A; IO = 7; ID1 = F; ID2 = E	(S-7.A.E.)
Wiring diagram		

(97S & 97W)

Solenoid Valve

Solenoid Valve



SOL 1 OUT

SOL 1 OUT +

SOL 2 OUT

SOL 2 OUT +

 3 wire RTN
 0

 Aux IN2 0

 Aux IN1 0

 Aux IN1 0

 Aux IN1 0

 Aux IN +
 0

 Asi 0

 Asi 0

 Asi +
 0


Position sensor and module

The Axiom platform has all position sensing, communication or switching integrated into C-module. Users may set open/closed positions conveniently and accurately on all modules. And easy to view instructions, along with bold LED indication, are displayed on the module itself.

Continuous sensing with open/closed settings


The C-module (continuous sensing) integrates a magnetic resistive sensor system to monitor exact valve position throughout the rotational range. Touch-sensitive or remote open and closed position setting along with microprocessor based operation make this state-of-the-art system convenient, reliable, and smart.

Position settings are made using the touch-sensitive buttons on the module's overlay. Simply operate the actuator to the open position (using standard internal manual override) and touch the SET OPEN button. Operate the actuator to the closed position and touch the SET CLOSED button. Position settings remain locked in when power is removed and reapplied.

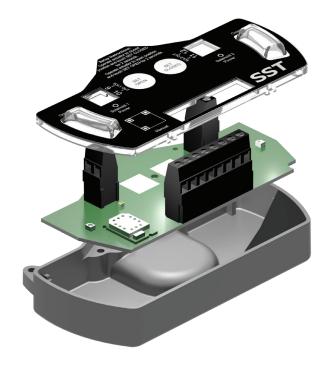

Reliable position sensing

An extremely reliable solid state magnetic resistive (mag res) sensor detects the valve position by monitoring the orientation of a magnet attached to the actuator. This design is tolerant of lateral and vertical shaft movement, which may occur in heavily used actuators, without affecting rotational measurement.

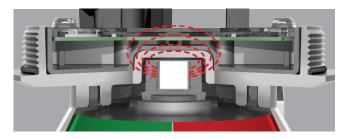

No cams, shafts or seals - offering exceptional vibration tolerance and nothing to wear out.

Axiom AN with Wireless Link

Easily access hard-to-reach automated valves

Discover convenient remote access of your automated valves when you install the Axiom AN with AS-Interface and DeviceNet featuring *Bluetooth*^{*} technology. Devices may be remotely accessed from up to 50 meters depending on obstructions. Setting changes and solenoid control are enabled through the DeviceNet or AS-Interface network or by the AS-Interface power supply jumper.

Special features

- Improve safety by easily controlling hard-to-reach automated valves without putting plant personnel at risk.
- Look up factory preset module code and serial number remotely.
- Electronically enter and store key automated valve system information including user tag and maintenance log.
- Reduce network commissioning time by accessing the VCT address and baud rate to make changes.
- Reduce maintenance time by monitoring valve cycle count, cycle times, storing maintenance logs, and accessing multiple valves from one location.
- Conveniently retrieve installation manuals for additional technical information when connected to internet.





Customize the tag for a device, change the address, force the solenoids on or off, wink the device, and set the valve limits.



Store and view additional information about a specific valve.



View real time valve position, cycle count, cycle timing, current valve temperature, error status, and more.

Interfacing devices

Conventional Apple[®] devices may be used including:

Version 4S and above iPhone*

iPad* Version 3.0 and above All

iPad mini™

Contact factory regarding additional devices and special enclosures to make these devices suitable for use in hazardous locations.



Set up and operation

Devices with Wireless Link are commissioned and set up identically to the standard AS-Interface or DeviceNet unit. In addition, when powered up with a conventional power source or by the network, it may be accessed by standard iOS devices. The Axiom is accessed with the Bluetooth[®] protocol using the Stonel Wireless Link application.

Sequence of operation is:

- 1. Download the Stonel application from the App Store onto your device (free of charge)
- 2. Start the application in your Apple[®] device
- 3. All energized wireless modules in range will come up
- 4. Push wink to positively confirm the device you have linked (device LEDs will flash)
- 5. Touch the specific ID tag to link with your handheld.

You can then monitor all status and diagnostic information and make necessary information changes to the free form fields at any time. Switch settings, address changes, and solenoid operation may be performed only if network- or power supply-enabled. Other information may also be added to the free form fields.

Wireless Link enabled network

All settings and inputs are locked when standard network communication is functioning. For fast commissioning and asset management you can import and export electronic tags, model number, serial number, device address, descriptive fields, diagnostic data and more to and from standard CSV/Excel[®] files.

Specifications for Wireless Link							
Standard specifications apply to Axiom AN35W, AN92W & AN97W. Additional specifications for Wireless Link are as follows:							
Communication	<i>Bluetooth</i> [*] technology; single mode (not compatible with <i>Bluetooth</i> Classic)						
Transmit power	4dBm or ~2.5 milliwatts						
Data rate	1 Mbit/second; effective information transmit rate ~10 Kbits/second						
Range	Up to 100 meters (330 feet) in free space. Range is reduced by obstructions between hand-held device and Wireless Link VCT. Line of site is not necessary.						
Registrations	FCC, IC, CE						
CE compliance	Exceeds industrial compliance standards						
VCT identification	VCTs in range will be displayed						
VCT link	One device accessed at a time between client (hand-held device) and server (VCT). Each server accessed by one client at a time						
Application	Stonel Wireless Link available from the App store						
Hand-helds	Compatible with iPhone [®] and iPad [®] with iOS 9 or later						



Device/\et

SERIES										
N Nonin	cend	ive or intr	insically	v safe						
FUN	NCT	IONS								
Sens	sor/ s	witching	module	6		Valv	e communication Termina	ls (VCTs)		
358	SST	Г Universa	ıl; 20 - 2	50 volt	(NO sensor)	92S	DeviceNet™			
35W	SST	Г Universa	ıl; 20 - 2	50 volt	(NO sensor) with Wireless Link	92W	DeviceNet [™] with Wireless	s Link		
45S	NA	MUR mo	dule (E	N 6094	7-5-6; I.S.)	97S	AS-Interface with extended	ed addressii	ng	
						97W	AS-Interface with extended	ed addressiı	ng and Wireless Link	
	1	PNEUMA	TIC O	VERRI	DE / CV [standard pneumatic pilot and va	lve -40° (C to 80° C]			
	I	For single	pilot			For	dual pilot			
	1	N Intern	al morr	entary	override only / 0.8 Cv	2N	Internal momentary over	ride only / (0.8 Cv	
	1	M Extern	nal mon	nentary	v & internal override / 0.8 Cv	2M	External momentary & in	nternal over	ride / 0.8 Cv	
	1	1L Extern	nal latch	ing &	nternal override / 0.8 Cv	2L	External latching & intern	nal override	/ 0.8 Cv	
	1	IE Intern	al mon	entary	override only / 1.2 Cv	2E	Internal momentary over	ride only / 1	1.2 Cv	
	1	IY Extern	nal mon	nentary	v & internal override / 1.2 Cv	2Y	External momentary & internal override / 1.2 Cv			
	1	G Extern	nal latch	ing &	nternal override / 1.2 Cv	2G	G External latching & internal override / 1.2 Cv			
	9	N No pr	eumati	cs						
		EN	CLOSU	RE						
		Cle	ar covei	·		Alur	ninum cover			
		С	North	Ameri	can (NEC/CEC)	А	North American (NEC/C	CEC)		
		D	Intern	ational	(IEC)	V	V International (IEC)			
			CO	NDUľ	Γ/CONNECTORS					
			Star	dard		Min	i-connectors	Mi	cro-connectors (M12)	
			02	(2) ½"	NPT	10	(1) 4-pin	13	(1) 4-pin	
			05	(2) M2	20	11	(1) 5-pin	15	(1) 5-pin	
						19	(1) 6-pin	17	(1) 6-pin	
						20	(1) 7-pin	18	(1) 8-pin [Lower voltage range, check specification	
						21	(1) 8-pin			
				VIS	UAL INDICATOR [see chart on page 11]	1				
				RA	Red closed/green open	1A	Three-way 1	XA	Special	
				GA	Green closed/red open	2A	Three-way 2			
odel numl				P 1	OPELOX					
N 35S]	IL C	02	RA	- OPTIONAL					
N	IOD	EL NUMI	BER		PARTNERSHIP ID					
founting h parately.	nardw	vare requir	ed and	sold	Some models may include 5-digit identification suffix.					

ERIES													
NX Explo	osionp	roof,	nonin	cendiv	e or in	trinsically sa	fe						
FU	NCT	ION	s										
Ser	nsor/ s	switcl	hing m	odules	\$				Valv	e communication Terr	minals (VC]	Гs)	
358	S SST Universal; 20 - 250 volt (NO sensor)						92S	DeviceNet™					
455	S NA	MUI	R modı	ıle (EN	1 60947	7-5-6; I.S.)			97S	AS-Interface with ex	tended addı	ressing	
]	PNE	UMAT	'IC OV	/ERRI	DE / CV [sta	andard pneumatic pi	ilot and valve	-40° (C to 80° C]			
	1	For si	ingle pi	ilot					For o	lual pilot			
	1	IN I	nterna	l mom	entary	override on	ly / 0.8 Cv		2N	Internal momentary	override on	ly / 0.8 Cv	
	1	M	Externa	ıl mon	nentary	7 & internal o	override / 0.8 Cv		2M	External momentary	7 & internal	override / 0.8 Cv	
							ride / 0.8 Cv		2L	External latching & i	internal over	rride / 0.8 Cv	
	1	IE I	nterna	l mom	entary	override on	ly / 1.2 Cv		2E	Internal momentary	override on	ly / 1.2 Cv	
	1	IY I	Externa	ıl mon	nentary	7 & internal o	override / 1.2 Cv		2Y External momentary & internal override / 1.2 Cv				
	1	IG I	Externa	l latch	ing &	internal over	ride / 1.2 Cv		2G	External latching & i	internal over	rride / 1.2 Cv	
	ç	•N N	No pne	umatio	cs								
			ENC	LOSU	RE								
			Alum	inum o	cover								
			A 1	North	Ameri	can (NEC/C	EC)						
			V 1	Interna	ational	(IEC)							
				CO	NDUI	Г/CONNEC	TORS						
				Stan	dard								
				08	(2) ¾"	NPT							
				09	(2) M2	25							
					VIS	UAL INDIC	CATOR [see chart be	elow]					
		RA Red closed/green open					1A	Three-way 1		XA Special			
						Green close	••••••		2A	Three-way 2			
1.1	1												
odel numl				0.0	D A		ODTIONAL						
NX 358		1L	А	08	RA		OPTIONAL						
			UMBE				TNERSHIP ID						
founting h	hardwa	are re	equired	l and s	old		odels may include						
eparately.	141 (197)		quireu	and 5	oiu		dentification suffix.						

Visual indicator designations

Clearly view valve position status from up to 75 feet with the Axiom's visual indicator. The indicator's rugged Lexan[®] construction makes it resistant to physical damage and tolerant to most corrosives.




DESIGNATION	0°	90°				
R	RED CLOSED	GREEN OPEN				
G	GREEN CLOSED	RED OPEN				
1	A B C					
2	A B C	A B C				
X	Specialty configuration - please consult factory					


 $\mathsf{Stonel}^{\scriptscriptstyle{\mathsf{I}\!\mathsf{M}}} \mathsf{Axiom}^{\scriptscriptstyle{\mathsf{I}\!\mathsf{M}}} \mathsf{ advanced explosion proof, nonincendive \& intrinsically safe on/off valve controller AN/ANX series$


Specifications		Position sensing			
Materials of construction		Accuracy	Within 1°		
Housing and air manifold plate	Epoxy-coated anodized aluminum	Repeatability	Within 1°		
Visual indicator drum	Nylon	Setting buffer	4° from setpoint (Rotational distance from original setpoint where switch will energize on return stroke)		
Visual indicator cover	Polycarbonate				
Fasteners	Stainless steel	Dead band	6° from setpoint (<i>Rotational distance</i>		
O-rings	Nitrile compound		<i>from original setpoint where switch will de-energize)</i>		
Operating life	1 million cycles	Max rotational range	120°		
Temperature range	-40 °C to +80 °C (-40 °F to +176 °F)	Ratings			
Warranty		Explosionproof	All ANX models* All models*		
Sensing and communication	Five years	(Ex d or Class I and II, Div. 1)			
module		Nonincendive (Class I and II, Div. 2)			
Mechanical components	Five years		E 4 450 1 X		
Unit weights		Intrinsically safe (<i>Ex ia Zone 0</i> ; <i>Class I and II</i> ,	Function 45S only*		
Aluminum	AN 2.38 kg / 5.25 lb	Div. 1)			
	ANX 2.83 kg / 6.25 lb	Enclosure protection			
Unit dimensions		Type 4, 4X and 6	All models		
Unit height Cover removal clearance	125 mm [4.90 in] 217 mm [5.89 in]	Ingress Protection 66 and 67	All models		
Cover removal clearance	217 IIIII [3.07 III]	Approvals*	See stonel.com/approvals		
		* Only models listed on valuet com/flowcontrol official website are			


* Only models listed on <u>valmet.com/flowcontrol</u> official website are approved per specific rating.

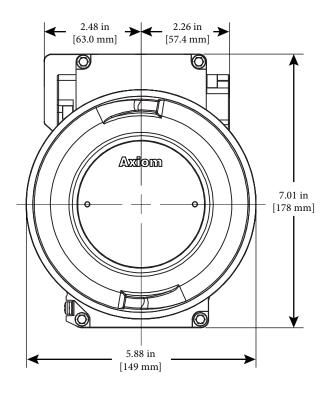



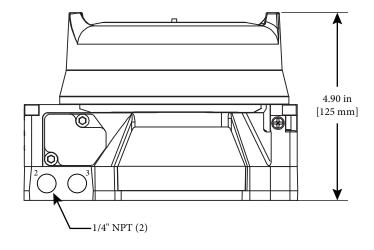

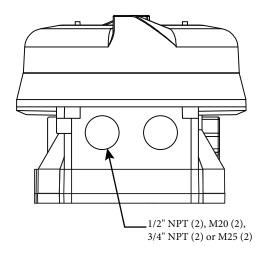

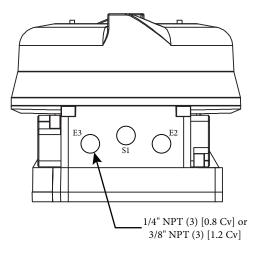

Valmet Flow Control Inc. Stonel product center 26271 US Hwy 59, Fergus Falls, MN 56537 USA . Tel. +1 218 739 5774. sales.stonel@valmet.com valmet.com/flowcontrol

Subject to change without prior notice. Neles, Neles Easyflow, Jamesbury, Stonel, Valvcon and Flowrox, and certain other trademarks, are either registered trademarks or trademarks of Valmet Oyj or its subsidiaries in the United States and/or in other countries. For more information www.neles.com/trademarks

